

# Break PTMP Barriers to Entry

## A5x Connectorized 2x2 Access Point

5.15–5.85 GHz FCC/ETSI/CA

4.9–6.4 GHz ROW



With fast client speeds and great access point capacity, along with local and network-wide spectrum reuse, the cost-effective, connectorized A5x delivers fiber-fast connectivity for any unlicensed Fixed Wireless network. The A5x is well suited for short to long-range pole and tower point-to-multipoint (PTMP) applications, access point colocation (GPS sync), and Municipal and Rural Licensed Public Safety multipoint (4.9 GHz; rest-of-world product). In situations where the A5c connectorized 4x4 access point is too much or too powerful, the A5x is the perfect choice.

### Fiber Speeds

With access point capacity of up to 700 Mbps (IP), the A5x delivers the speeds consumers and business users demand at a fraction of the cost of delivering fiber-to-the-premises.

### Increased Capacity at Each Site

With integrated, high-precision SRS (GPS sync) technology, new A5x sectors can easily be added at existing A5 and B5 sites and reuse the same channel. This saves valuable, scarce unlicensed spectrum resources when new A5x devices are installed “back-to-back” on the same tower or pole.

### Add Subscribers with Ease

Install, aim and go! We’ve eliminated manual installation and pre-provisioning complexity, so you can focus on adding subscribers quickly.

### Ultra-High Client Capacity

TDMA techniques provide significant improvements when scaling the number of clients. By dynamically allocating upstream timeslots upon client request, network scale, spectrum efficiency and access point utilization are optimized to the highest degree possible.

### Extended Frequency Available

Rise above the noise with available extended frequency support from 4.9–6.4 GHz, with the rest-of-world (ROW) product (restricted by country of operation).

## Technical Specifications

### Performance

- **Max Throughput:** Up to 700 Mbps (IP)
- **Client Capacity:**  
64 clients (WiFi Interop);  
44 clients (SRS/GPS sync)
- **Wireless Protocols:** WiFi Interop, Spectrum Reuse Synchronization (SRS/GPS sync)

### Radio

- **MIMO & Modulation:** 2x2:2 MIMO OFDM up to MCS9 (256-QAM 5/6)
- **Bandwidth:** 20/40/80 MHz channels; Tunable in 5 MHz increments for GPS Sync; Tunable to standard WiFi channels for WiFi Interop
- **Frequency Range:**  
5150–5850 MHz FCC/ETSI/CA (PN: 100-00107)  
4900–6400 MHz ROW (PN: 100-00107-1)  
Restricted by country of operation
- **Max Output Power:** 27 dBm
- **Sensitivity (MCS 0):**  
-87 dBm @ 80 MHz  
-90 dBm @ 40 MHz  
-93 dBm @ 20 MHz

### Power

- **Max Power Consumption:** 9–12.9 W
- **System Power Method:**  
Passive PoE (24–56 VDC)
- **System Lightning & ESD Protection:** 6 kV
- **PoE Power Supply:**  
Passive POE compliant, 24–56 VDC (PoE injector not included)

### Physical

- **Dimensions:**  
Height: 188.4 mm (7.42" including gland)  
Width: 75 mm (2.95")  
Depth: 44 mm (1.73")
- **Weight:** 0.30 kg (0.70 lbs)
- **Enclosure Characteristics:** Outdoor UV-stabilized engineered polymer with integrated mounting back
- **Mounting:** Single pole strap (not included) and slip on mount for comparable antennas
- **Connector Type:** (2) RP-SMA (female)

### Environmental


- **Outdoor Ingress Protection Rating:** IP67
- **Operating Temperature:** -40°C to +55°C (-40°F to 131°F)
- **Operating Humidity:** 5 to 100% condensing
- **Operating Altitude:** 4,420 m (14,500') maximum
- **Shock & Vibration:** ETS 300-019-2-4 class 4M5

### Features

- **Gigabit Ethernet:** 10/100/1000-BASE-T
- **Collocation Synchronization:** 1PPS GPS TX/RX synchronization for collocated co-channel radios; Adjustable up/downstream bandwidth ratio
- **Management Services:** Cloud monitoring and provisioning; SNMPv2c/v3; Syslog; HTTPS; HTML 5-based Web GUI; mDNS support; IPv4 and IPv6
- **Smart Spectrum Management:** Active scan monitors/logs ongoing RF interference across channels (no service impact); Dynamic auto-optimization of channel and bandwidth use
- **Security:** WPA2; AES; RADIUS; 802.1x authorization
- **VLANs:** Per subscriber VLAN; Management VLAN; CPE data VLAN; Passthrough mode; Untagged traffic control; DSCP-COS mapping
- **QoS:** Supports 3 user-configurable QoS levels for SRS (GPS Sync) (CBWFQ); Behavior Aggregate (BA) and CoS Classifier, with user-configurable precedence
- **GPS Location:** GNSS1 (GPS + GLONASS)

### Regulatory + Compliance

- **Approvals:** FCC Part 15.407 and Part 90Y, IC RSS210, CE, ETSI 301 893/302 502
- **RoHS Compliance:** Yes
- **Safety:** EN 62638-1
- Available in two different part numbers:  
**PN: 100-00107:** 5150–5850 MHz FCC/ETSI/CA  
**PN: 100-00107-1:** 4900–6400 MHz ROW  
Restricted by country of operation

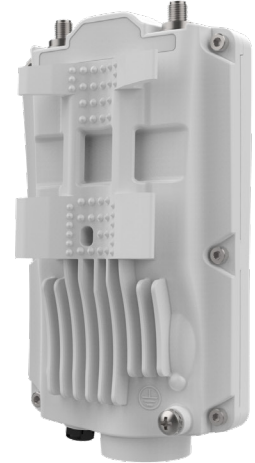

Mimosa Networks, a division of Radisys, is the global technology leader in wireless broadband solutions, enabling service providers to connect dense urban and hard-to-reach rural homes at a fraction of the cost of fiber. Mimosa Networks was acquired in 2023 by Radisys Corporation, a wholly owned subsidiary of Jio Platforms Limited.